

FERRITE CORE | UU-Core

磁芯品名规则说明(例)

SMP40 UU79/129/31

材质

磁芯形状

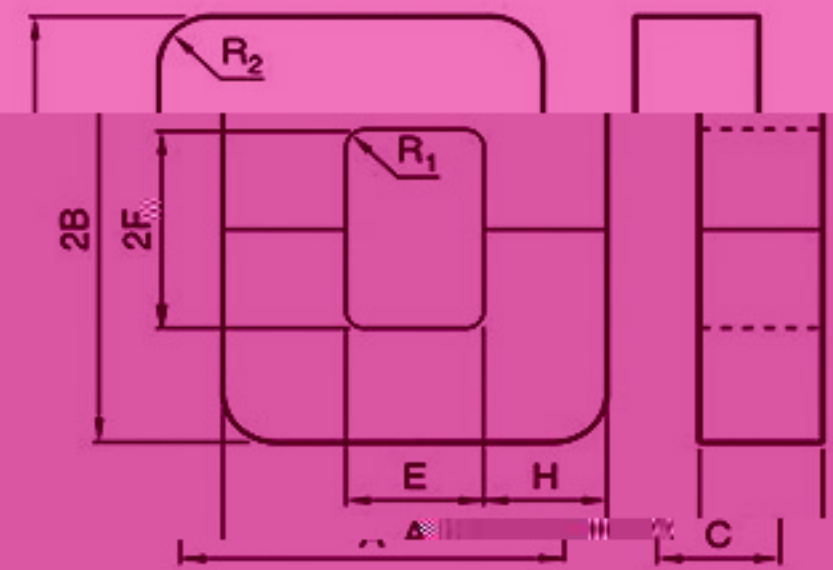


Fig.1

NO.	品 名		形状	尺寸规格(Unit: mm)										磁芯 材料	实效截面 mm ²	最小实效截 mm ²	实效磁路 mm	实效 mm	重量 g	电气特性		IEC		
	磁芯品名	材质		2a	2b	L	E	2c	H	R1	R2	TL	As (mm ²)							Asmin (mm ²)	Le (mm)	Ve (mm ³)	Weight (g)	ALH 0.5mA
1	UU7	SMH52	Fig.1	SMH72	8.7±0.15	10.147±0.3	15.0	2.8±0.1	3.9	8.6±0.3	2.8±0.1				4.280	8.08	7.84	34.55	279	285	900±25%		840min	
2	UU10.5	SMP47	Fig.1	SMP40	10.5±0.3	15.6±0.5	5.0±0.2	5.2	10.5±0.5	2.5±0.3					3.170	12.50	12.50	40.30	504	5	1000±25%		1500±25%	
3	UU79/129/31	SMP90	Fig.1	SMP40	79.0±2.5	129.0±2.5	31.5±1.0	34	85.0±1.5	22.0±1.0	5	22	0.446	693.00	682.00	309.00	214220	1103	5768±25%		1103	8700±25%	1630	6990±25%
4	UU100/151/30	SMP90	Fig.1	SMP40	100.0±3.0	151.0±2.5	30.0±1.0	39	90.0±1.5	30.0±1.5	5	20	0.389	915.00	900.00	355.00	221824	1664	6686±25%		1664	10000±25%	1000	5640±25%
5	UU101/115/25	SMP90	Fig.1	SMP40	101.0±3.0	115.0±2.5	25.4±1.0	50	64.0±1.5	25.0±1.0	5	25	0.478	648.00	635.00	309.00	200350	1021	5395		1021	8200	1240	3960
6	UU120/170/20	SMP90	Fig.1	SMP40	120.0±3.0	170.0±2.5	20.0±1.0	50	64.0±1.5	25.0±1.0	5	25	0.478	648.00	635.00	309.00	200350	1021	5395		1021	8200	1240	3960
7	UU150/39	SMP90	Fig.1	SMP40	150.0±3.0	39.0±1.0	2.5±0.1	50	64.0±1.5	25.0±1.0	5	25	0.478	648.00	635.00	309.00	200350	1021	5395		1021	8200	1240	3960